


DESCRIPTION

This procedure is performed after the Smart Pulsa has been installed on the post and the power supply has been wired ready for connection.




CHECK SWITCHES

Check switch is in the correct position as shown. For SMART the GPRS/SMART switch should be to the right.

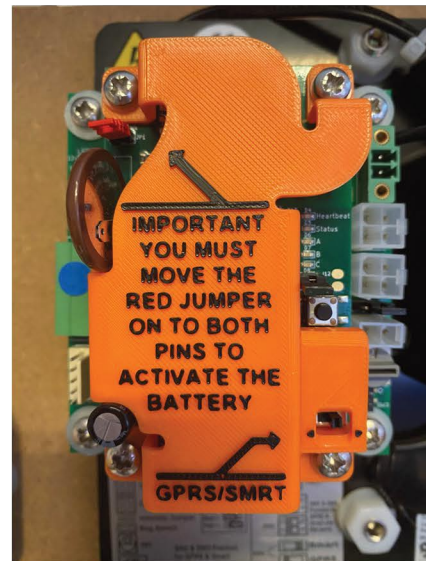

CONNECT POWER

Connect power: Check that all 5 LEDs on upper PCB illuminate for 1 second. After a couple of seconds the end 2 LEDs will pulse. This is correct operation.

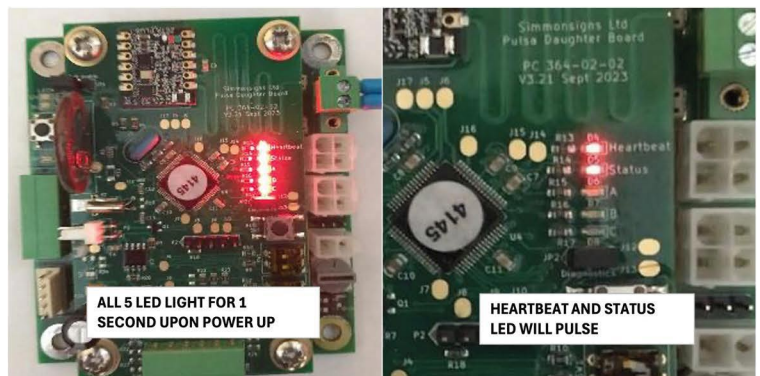

Simmons signs Limited reserves the right to alter or improve this guide without prior notice

JUMPER SETTINGS

The Pulsa is supplied with preset intensity. This is normal for the majority of applications. It is at this point that the jumper setting should be changed if required. This can be found on the lower PCB next to the magnetic switch connector.

CLUSTERS & MAGNET SWITCH

Confirm that the Clusters and Magnet switch operate correctly by swiping the Magnet at the bottom of the Pulsa. The Clusters should operate for approx 10 seconds.




FITTING JUMPER

Fit JP1 by the battery, ensure both terminals are covered.



AS RECEIVED
JUMPER OVER 1 PIN



UPON INSTALLATION
JUMPER OVER 2 PINS

If the above is successful the Pulsa is now ready to receive a calendar from the Simpod