


DESCRIPTION

The Guide Post is a tough reboundable low level sign system ideal where aesthetics and clutter reduction have a high priority. Featuring a tough moulded body carrying a single or double sided 300mm sign, coupled to an extremely durable return device. Available with an illuminated or reflective sign legend, the illuminated version uses the latest, low energy, long life, LED lighting technology which meets the requirements of BS EN 12899-1:2008 Class L3 (L2 double sided) with U3 uniformity.

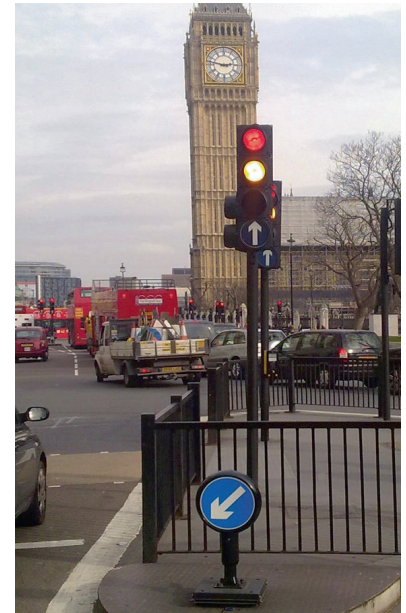

CONSTRUCTION

Body	One piece rotationally moulded medium density polyethylene, self-colour black. 4mm nominal wall thickness.
Graphics	300mm single aspect micro-prismatic reflective 300mm meets the requirements of BS EN8408:2005. Optional rear aspect.
Lighting	5mm polycarbonate housing encompassing LED light engine. LED driver installed internally.

OPTIONS

- Photoelectric cell
- Double sided version
- Retention socket version
- Base light installation adaptor for most popular bases

FIXING METHODS

Optional fixing methods





Rebated Base
(Reflective only)



50 x 50 Retention Socket
(Illuminated & Reflective)

Simmons signs Limited reserves the right to alter or improve this guide without prior notice.

DIMENSIONS

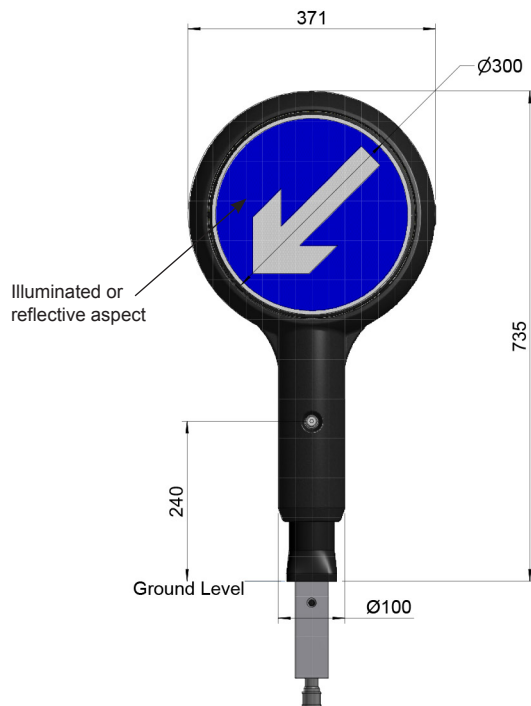

Retention socket version shown

All dimensions in mm

LIGHTING EQUIPMENT

	Single Sided		Double Sided	
	230 V AC	24 V AC	230 V AC	24 V AC
Mean Illuminance	L3		L2	
Uniformity	U3		U3	
UMSUG Code	40 0005 0017 100	40 0009 0007 100	40 0009 0006 100	40 0010 0000 100
Power (W)*	5	9	9	10
Guarantee (yr)**	2	2	2	2

*Improvements in LED technology may result in a change to this information

** The guarantee relates to the unit only. It does not include the photocell guarantee.

PACKAGING DETAILS

Product	Weight	Packing	Dimensions	Pack Quantity
Westminster Guide Post	5kg	Carton	400 X 200 X 1080mm	1 per box

Simmons signs Limited reserves the right to alter or improve this guide without prior notice.