

LUB MKT Data Guide









LUB MKT

DESCRIPTION

The LUB MkT is a proven sign light system, with over 20 years development and field use. It features a robust cast aluminium head which fits to a range of anti-rotational fixing bracketry, to meet all site fixing requirements. 3 power efficient models are now available to suit 900, 1200 and 1500 mm signs.



CONSTRUCTION

Body &	Die Cast LM6-M aluminium, acid cleaned, chromate primed and polyster powder-coated
Lens Frame	Aircraft Grey to BS381C: 1980 No. 693. All threads stainless steel bushed.
Lens	Fully supported 3mm polycarbonate.
Mounting	Range of anti-rotational mounting options - please see below.
Lighting	LED - 3 power efficient lighting arrangement to suit 900, 1200 and 1500 mm signs using custom lens
Equipment	technology mounted on a removable gear tray. Available in 240 vac and 24 v versions.

FIXING BRACKETS



Post top single 76, 89 or 114mm



Post top double 76, 89 or 114mm



Clamp round 140mm bracket (single)



Clamp round 140mm bracket (double)



Three band channel Use with Tespa banding (not supplied)



Uniclip and Keep 76, 89 or 114mm Set of 2



Set of 4 Uniclips 76, 89 or 114mm



Wall mounting plate

PACKAGING

Product	Weight	Packing	Dimensions	Pack Qty
LUB unit	7.15 KG	Carton	55 x 55 x 16cm	1

Simmonsigns Limited reserves the right to alter or improve this guide without prior notice.

OPTIONS

Integral photocell Remote monitoring equipment Black finish Other paint finishes on request Other bracket sizes

RELATED PRODUCTS



LUA SIGNLIGHT

simmonsigns.co.uk

+44 (0)7841 052 022 +44 (0)1952 293 333 Stafford Park 5 **Telford Shropshire** TF3 3AS


Doc Ref: DG014 Issue Date: February 2022 Issue Number: 6



PERFORMANCE

Model	LUB 900		LUB 1200		LUB 1500	
Plate size	900 mm ●▲▼		1200 mm ●▲▼		1500 mm ●▲▼	
Lighting Class Compliant with BS EN 12899-1	E3 UE3		E3 UE3		E2 UE2	
LED's						
Voltage	240 v	24 v	230 v	24 v	240 v	24 v
Power Consumption	15W	16.7W	20W	20W	10.3W	11.7W
PFC	0.96	0.61	0.96	0.65	0.88	0.51
UMSUG Code	42 0015	42 0017	42 0020	42 0020	42 0010	42 0012
	0000 100	0000 100	0000 100	0000 100	0000 200	0000 100

DIMENSIONS

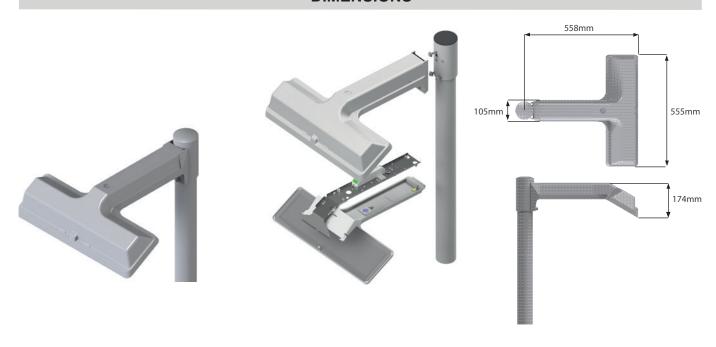

Simmonsigns Limited reserves the right to alter or improve this guide without prior notice.